CTV/FSV MHO-ASGARD



Vessel Specifications

Build	2021
Shipyard	AFAI Southern Shipyard, Guangzhou, China
Flag	Danish
CLASS	✤ 1A HSLC Crew Battery(Power) Windfarm R1
Trade area	Worldwide
Length O.A.	35 m
Beam	11 m
Max draft	1,59 m
Air draft	11,07 m
Bow fender height	4,2 m
GT	412
NT	124
IMO No.	9915533
Call Sign	OZIK2
MMSI	219028352
E-mail	mho-asgard@mho-co.dk
Telephone	+44 78 77 52 28 97
Satellite Phone	+45 82 13 64 19

Performance

Max speed @ workload Max speed @ full load Range @ 15 knots

23 knots
20 knots
3.800 Nm

Crew and IP facilities

Crew	5
Beds	8 x single cabins
IP capacity	24
Suspension Seats	24 Grammar xx seats
Seating area	4 x Tables with business class comfort seats
Facilities	WI-FI throughout the vessel
	5 x 42" TVs for safety videos
	2 x public toilets + wet room with shower
	w/ cabinets and hangers
Pantry	Stove, microwave, coffeemaker and kettle
	3 x Refrigerator, 3 x freezers

Capacities

4 x 15.000 L, 2 x 2.500 L, Total 65.000 L Ship tanks 2 x 5.000 L, total 10.000 L Cargo tanks 3.500 L Fresh water 2.500 L Sewage 2 x 500 L Sludge AdBlue 2 x 500 L With 10.000 L fuel: 57.000 kg Max cargo Forward deck area 100 m² 2 t/m² Fwd deck area strength 10 m² Aft deck area Total deck area 110 m² [2 x 10' + 4 x 20'] or [10 x 10'] **Container fittings**

MHO-Co A/S

Morsøgade 4

(+45) 53 70 46 45

øgade 4 🔹 🔹

DK-6700 Esbjerg

VAT/CVR: DK37454427

• <u>info@mho-co.dk</u>

-6700 Esbjerg

<u>www.mho-co.dk</u>

MHO Asgard - Vessel Specifications - Page 1 of 3

CTV/FSV MHO-ASGARD



Deck equipment

Crane Fuelling Pump capacity Pressure washer Deck power output AMCO VEBA 815-4s: SWL: 1.065 Kg @ 10,25 m 1 x 40 m 2" hose 750 L/min @ 23 m // 400 L/min @ 45 m High pressure washer with 40 m hose 3 x Reefer plugs 380 V 4 & 5 pin

Engines

Main	2 x Volvo D13 515kW @2250rpm
Auxiliary	1 x Volvo D5
Propulsion Motors	2 x Danfoss EM-PMI540-T3000-
	2000@550kW@2250rpm
Generating Motors	5 x Volvo D8
	w/ Danfoss EM-PMI375-T1100-1800
IPS	4 x Volvo IPS 30
Battery	Dolphin 5 x 78kWh, design life 10 years
-	Max voltage 640Vdc, min. voltage 480Vdc -

Capable of 12 hours Standby

Bridge control

Manoeuvring Manoeuvring stations Manoeuvring stations Navigation lights Monitoring BWA

Volvo IPS "DP0" system 1 x main station + 1 back-up on bridge 2 x wing station w/ joystick Lupolight LED CCTV with 24 cameras and 10 days storing Furuno BR-500




Navigation equipment

Radar	Furuno FAR-1518-BB ARPA Radar
Radar	Furuno DRS-4D-NXT
ECDIS	2 x Furuno FMD-3100 full ECDIS
VHF	2 x Furuno FM-8900S
VHF	Motorola DM-4400E with P-channels
MF/HF	Furuno FS-1575
AIS	McMurdo Smart find M5
Sat Compass	Furuno SC-70
GPS	Furuno GP-170
Echo sounder	Furuno FCV-588
Nav tex	Furuno NX-700
Speed log	Furuno GS-100
Autopilot	Navitron NT-888G
Motion dampening	Humphree Active Ride control

Charter facilities

On bridge

Sofa w/ table and workstation Refrigerator, sink, coffeemaker and kettle

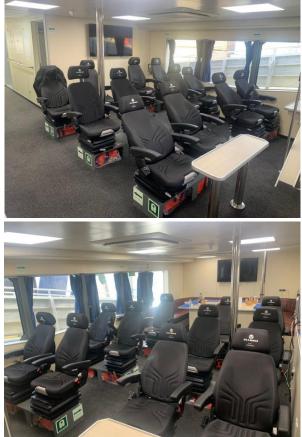

VAT/CVR: DK37454427

info@mho-co.dk

DK-6700 Esbjerg

www.mho-co.dk

MHO-Co A/S

Morsøgade 4 (+45) 53 70 46 45

